


SELEC




Ordering Information

Model	Supply Voltage
EM306-C	90 to 270V AC/DC

Terminal Connections

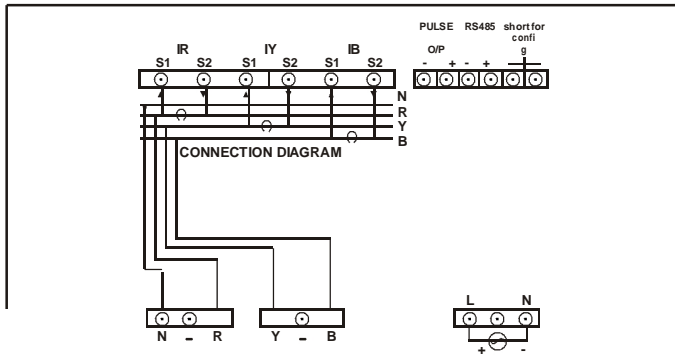

Dimensions (in mm)

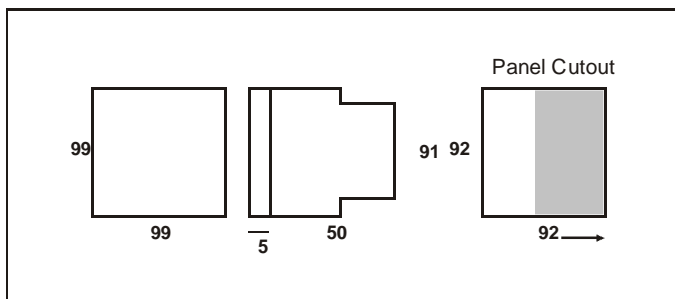

Technical Specifications

Display	6 digit 7 segment LED display. Height 0.5"
Led Indications	INT - Integration of energy X10 - Resolution is 10 REV - Reverse connected CT warning
Input Type	3 Ø - 4 wire and 1 Ø - 2 wire
Frequency Range	50 Hz
Rated Input Current	6A max.
Ct Primary (selectable via rear key)	5, 30, 40, 50, 60, 75, 80, 100, 150, 200, 250, 300, 400, 500, 600, 800, 1000, 1200, 1500, 1600, 2000, 2500, 3000, 4000, 5000.
Burden	0.5 VA@5A per phase
Measurement	kWh
Accuracy	Class 1
Auxiliary Supply Range	90 to 270V AC / DC, 50/60 Hz
Output	Pulse Output: Voltage range - 24 VDC Current capacity - 100 mA max Pulse Width: 500 ms ± 50 ms.
Temperature	Operating: 0 to 50 °C Storage -20 to 75 °C
Humidity	85% non-condensing
Mounting	Panel mounting
Weight	225 gms

Also Selec Make Economical PLC and HMI



For **Quote and Solutions** mail us at selectautomation@airtelmail.in

Visit **Us** at www.selectautomation.net