



CE PENDING
1/8 DIN
48mm x 96mm

FEATURES

- ! 4 Digit, 7 segment LED
- ! 0.01 Resolution
- ! Available in 240V AC & 24V AC (On Request)



TECHNICAL SPECIFICATIONS

INPUT SPECIFICATIONS

Resolution	0.01
Input Measurement Range	45 - 65 Hz
Accuracy	± 0.05 Hz

FUNCTIONAL SPECIFICATIONS

Over Range Indication	"Or" (Over 65 Hz)
Under Range Indication	"Ur" (Under 45 Hz)
Electrical Connection	1Ø


GENERAL SPECIFICATIONS

Auxiliary Supply Voltage	110V AC (45 - 65Hz) ±20%
	Available on request: 240V AC (45 - 65Hz) ±20%
Frequency Range	45 - 65 Hz
Supply Variation	0.75 to 1.25 x Vn
Over Voltage	1.5 x Vn continuous, 2 x Vn (3s)
Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	95% RH
Weight	170 g (0.374 lbs)
Protection Level	IP65 for faceplate


ORDERING INFORMATION

Part No.	Supply Voltage
MF16-110V	110 V AC

TERMINAL CONNECTIONS

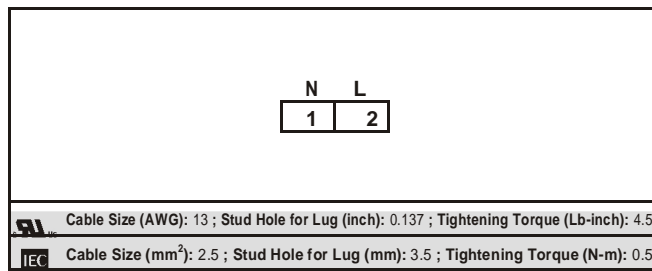

DIMENSIONS

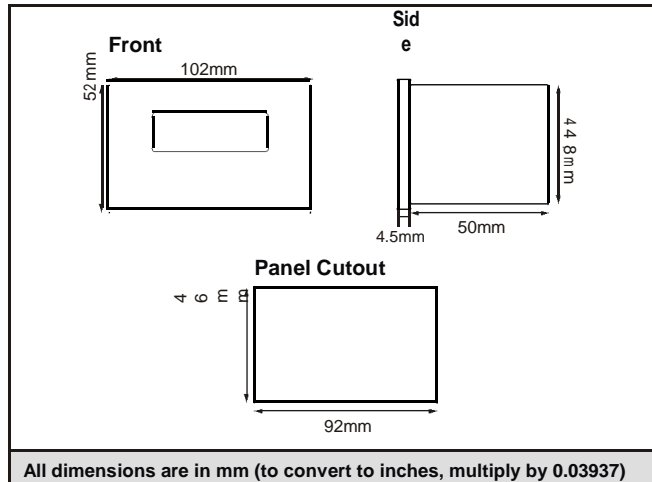

Also **Selec Make Economical** PLC and HMI



For **Quote and Solutions** mail us at selectautomation@airtelmail.in

Visit **Us** at www.selectautomation.net