




1/8 DIN  
48mm x 96mm


ORDERING INFORMATION

Part No.	Supply Voltage
MP14-110V	110 V AC

TERMINAL CONNECTIONS

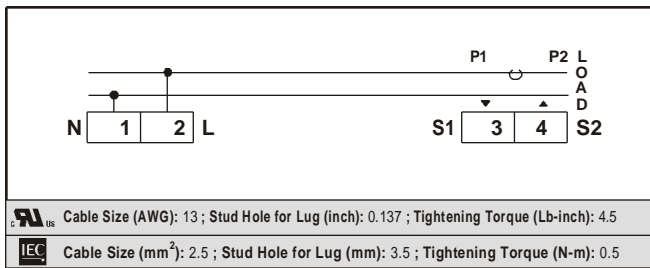

DIMENSIONS

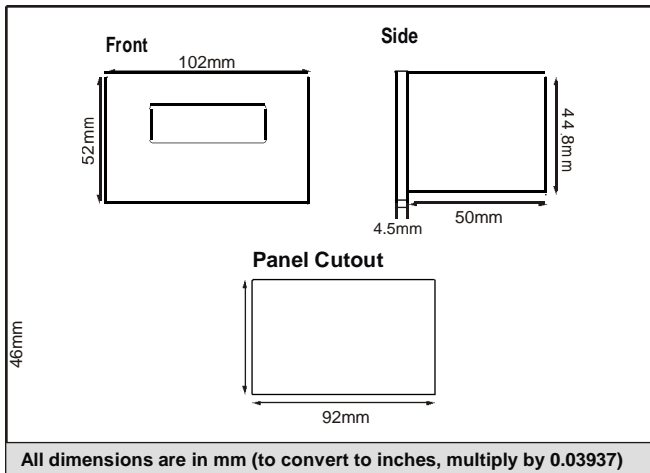

FEATURES

- ! 4 Digit, 7 segment LED
- ! 0.001 Resolution
- ! Available in 240V AC & 24V AC (On Request)



Authorised System Integrator

TECHNICAL SPECIFICATIONS

INPUT SPECIFICATIONS

Resolution	0.001
Input Current Measurement	0.250 - 6A (AC)
Accuracy	± 0.5% (± 1 digit)

FUNCTIONAL SPECIFICATIONS

Electrical Connection	1Ø 2 wire
-----------------------	-----------

GENERAL SPECIFICATIONS

Auxiliary Supply Voltage (Vn)	110V AC ( 50 / 60Hz) ±20% Available on request: 240V AC ( 50 / 60Hz) ±20%
Frequency Range	50 / 60 Hz
Supply Variation	0.75 to 1.25 x Vn
Over Voltage	1.5 x Vn continuous, 2 x Vn (3s)
Temperature	Operating: 0 to 50°C (32 to 112°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	95% RH
Weight	170 g (0.374 lbs)
Protection Level	IP65 for faceplate

Also **Selec** Make Economical PLC and HMI



For **Quote and Solutions** mail us at [selectautomation@airtelmail.in](mailto:selectautomation@airtelmail.in)

Visit **Us** at [www.selectautomation.net](http://www.selectautomation.net)