



1/4 DIN  
96mm x 96mm



Authorised System Integrator

**FEATURES**

- ! 4 Digit, 7 segment LED
- ! 0.001 Resolution
- ! Available in 240V AC & 24V AC (On Request)

**TECHNICAL SPECIFICATIONS**

**INPUT SPECIFICATIONS**

Resolution	0.001
Input Current Measurement	0.250 - 6A (AC)
Accuracy	± 0.5% (± 1 digit)

**FUNCTIONAL SPECIFICATIONS**

Electrical Connection	1Ø 2 wire
-----------------------	-----------


**GENERAL SPECIFICATIONS**

Auxiliary Supply Voltage (Vn)	110V AC (50 / 60Hz) ±20%
	<b>Available on request:</b> 240V AC (50 / 60Hz) ±20%
Frequency Range	50 / 60 Hz
Supply Variation	0.75 to 1.25 x Vn
Over Voltage	1.5 x Vn continuous, 2 x Vn (3s)
Temperature	Operating: 0 to 50°C (32 to 112°F) Storage: 0 to 70°C (32 to 158°F)
Humidity (non-condensing)	95% RH
Weight	190 g (0.418 lbs)
Protection Level	IP65 for faceplate


**ORDERING INFORMATION**

Part No.	Supply Voltage
MP314-110V	110 V AC

**TERMINAL CONNECTIONS**

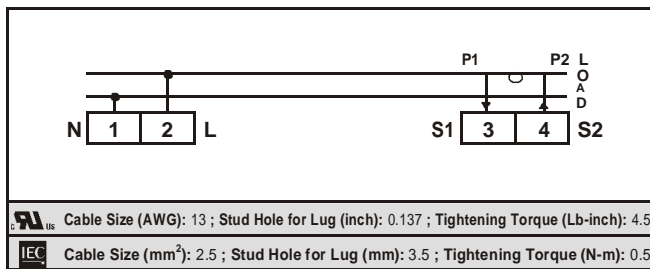

**DIMENSIONS**

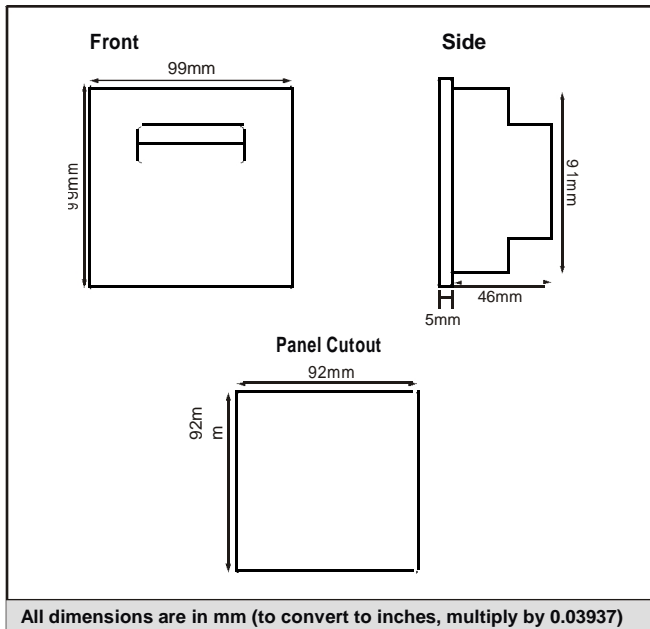

Also **Selec Make Economical** PLC and HMI



For **Quote and Solutions** mail us at [selectautomation@airtelmail.in](mailto:selectautomation@airtelmail.in)

Visit **Us** at [www.selectautomation.net](http://www.selectautomation.net)