SELEC TIMERS PT380 TIMERS

sales@selectautomation.net
www.selectautomation.net

SEQUENTIAL TIMER (96 x 96)

Ordering Information

PT380

Terminal Connections

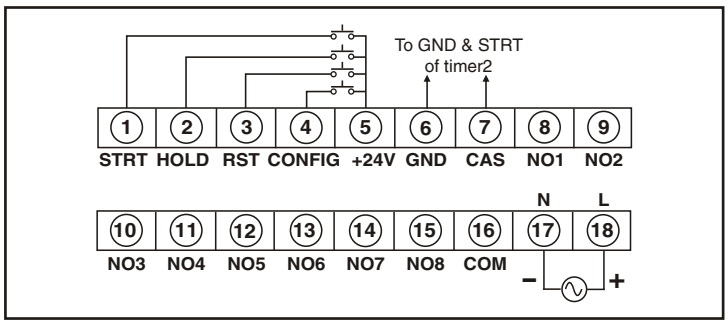

Dimensions (in mm)

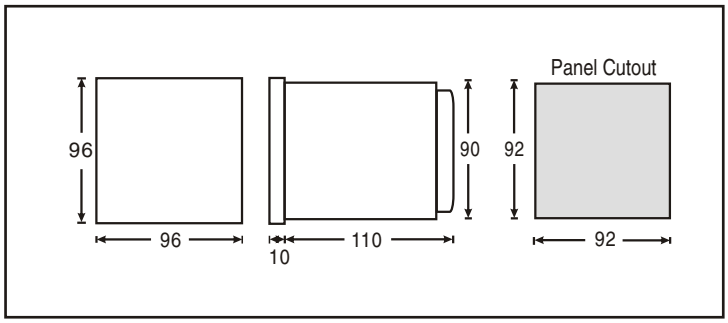

Technical Specifications

Display	7 segment LED; Height: 0.3”
Digits	2 + 4 digits
Time Setting	Front keypad
No of Channels	8 channels
Operating Modes	ON delay, Interval, Cyclic ON first, Cyclic OFF first (start up delay & no. of cycles programmable for cyclic mode)
Setpoints	8
Range	99.99, 999.9, 99:59 min:sec, 99:59 hr:min, 999.9 hr
Counting Direction	Up
Start Input	Start, Hold
Accuracy	±0.5% of setting or 50 ms, whichever is greater
Reset	Front, remote, on power interruption
Memory	10 years
Configuration Lock	via rear terminals
LED Indications	Relay status, Cascade O/P , Time range, ON/OFF time, Timing in progress
Output	8 nos., NO with single common
Relay Rating	5 A @ 230 VAC
Supply Voltage	85 to 270 VAC/DC, (AC : 50 or 60 Hz)
Temperature	Operating: 0 to 50°C Storage: -20 to 75°C
Humidity (non-condensing)	95% RH
Weight	420 gms