

OPERATING INSTRUCTIONS

RC5100/5100A/4100/2100 & RC100A/100C

Please maintain these instructions and review them prior to using the unit:

⚠ Warning:

1. This unit is panel mounted type with its output terminals getting connected to the host equipment. Such equipment shall also comply with basic EMI/EMC and safety requirements like BS EN 61326-1 and BS EN 61010 respectively.
2. To avoid electric shock, power supply of the unit should be kept off while wiring. Wiring should be done strictly as per the terminal layout, given in the manual.
3. Use lugged terminals to meet M3 screws.
4. The unit does not have a built-in fuse. External fuse rated 275VAC/1A is recommended.

⚠ Caution:

1. This unit is not intended for outdoor use.
2. The power connection cable must have a cross-section of at least 1mm² and insulation capacity of at least 1.5kV.
3. The output connections must not be loaded beyond the specified values/range.
4. Avoid inflow of dust and contact of conductive material with the internal circuitry of the unit.
5. The unit must not operate in presence of heating sources, caustic vapors, oil, steam, vibration or impact etc.
6. Do not use any organic solvents like Isopropyl alcohol. Care must be taken to avoid entry of water into the circuitry through the ventilation holes.

SPECIFICATIONS

SUPPLY VOLTAGE

90 to 270 VAC/ DC; AC: 50/ 60 Hz

DISPLAY

4 digit, 7 segment LED

RC5100 & RC4100:

0.3" height Bright Red LED

RC2100 & RC100A:

0.5" height, Bright Red LED

RANGE

Auto ranging (4.00 to 9999 RPM)

ACCURACY

0.05%

SENSOR SUPPLY

12 VDC(±10%), 30 mA

INPUT

- a) Voltage pulse : 3 to 30 VDC from proximity switches (**PNP type**), encoders or solid state devices.
- b) Potential free contact from limit switch, relay or micro - switch

OPERATING TEMP.

0 - 50°C

HUMIDITY

95% RH

HOUSING

CE marked products: Flame retardant plastic


Non CE products: ABS plastic.

WEIGHT

RC5100 -150gms, **RC5100A** - 150gms. **RC4100** - 111gms,


RC2100 - 232gms, **RC100A** - 365gms. **RC100C** - 365gms.

PANEL DIMENSIONS(dimensions in mm)

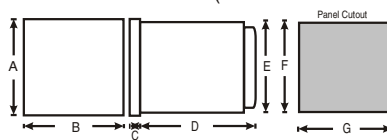

MODELS DIM	A	B	C	D	E	F	G
RC5100	48	48	7	100	45	46	46
RC5100A	48	48	7	100	45	46	46
RC4100	36	72	4.5	73	31	32	69
RC2100	72	72	10	115	68	69	69
RC100A	48	96	10	123	45	46	92
RC100C	50	97.5	10	88	45	46	92

TERMINAL CONNECTIONS

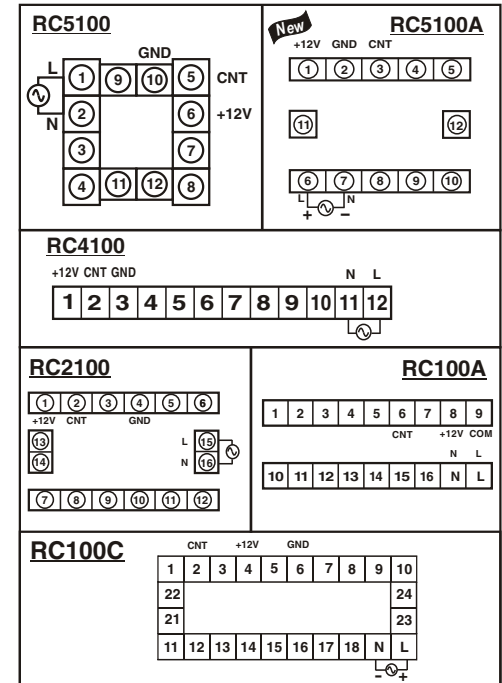

Sensor color codes and Connections:-

Red = +12V, Green = CNT, Black = GND;

Brown = +12V, Black = CNT, Blue = GND.

For using Potential free contact, connect the contact across +12V and CNT terminals.

(Specifications subject to change as development is a continuous process).

Selec Controls Pvt. Ltd. (Formerly Selectron Process Controls Pvt. Ltd.)

Tel:91-22-28476443/1882, Fax:91-22-28471733,

Website: www.selecindia.com E- mail: sales@selecindia.com.