High accuracy push wheel setting timers

(48 x 48)

Ordering Information

XT56

Terminal Connections



NOTE: XT564 - 1 Relay only

Dimensions (in mm)

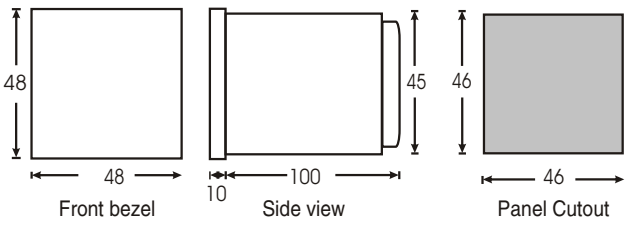

Technical Specifications

Display	7 segment LED; Height: 0.3”
Digits	3 digits
Time Setting	Pushwheel
Operating Modes	ON delay / Interval
	1
	9.99 / 99.9 / 999 sec, 99.9 / 999 min, 99.9 hr
Counting Direction	Down
Start Input	Pulse start
Accuracy	±0.05% of F.S. or 50 ms
Reset	Front, Remote, Power interruption
LED Indications	Relay status
Output	2 C/O (DPDT)
Relay Rating	5 A @ 230 VAC
Supply Voltage	85 to 270 VAC/DC (AC : 50 or 60Hz)
Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	200 gms
Certifications	CE

SELEC TIMERS XT56 Timers, SELEC TIMERS Timers XT56, SELEC TIMERS XT56 Timers Dealers SELEC TIMERS XT56 Timers Exporters, SELEC TIMERS XT56 Timers Distributors, SELEC TIMERS XT56 Timers Manufacturers, SELEC TIMERS XT56 Timers Suppliers, SELEC TIMERS XT56 Timers Traders, SELEC TIMERS XT56 Timers in Chennai Tamilnadu India, SELEC TIMERS XT56 Timers in Kolkata, SELEC TIMERS XT56 Timers in Mumbai, SELEC TIMERS XT56 Timers in Hyderabad, SELEC TIMERS XT56 Timers in Andhra Pradesh, SELEC TIMERS XT56 Timers in Karnataka, SELEC TIMERS XT56 Timers in Kerala, SELEC TIMERS XT56 Timers in Gujarat, SELEC TIMERS XT56 Timers in Maharashtra, SELEC TIMERS XT56 Timers in Madhya Pradesh, SELEC TIMERS XT56 Timers in Rajasthan, SELEC TIMERS XT56 Timers in Punjab, SELEC TIMERS XT56 Timers in Haryana, SELEC TIMERS XT56 Timers in Delhi, SELEC TIMERS XT56 Timers in Uttar Pradesh, SELEC TIMERS XT56 Timers in Uttarakhand, SELEC TIMERS XT56 Timers in Maharashtra, SELEC TIMERS XT56 Timers in Pune, SELEC TIMERS XT56 Timers in Bihar, SELEC TIMERS XT56 Timers in Madurai, SELEC TIMERS XT56 Timers in Agra, SELEC TIMERS XT56 Timers in Andhra Pradesh, SELEC TIMERS XT56 Timers in Rajasthan, SELEC TIMERS XT56 Timers in Karnataka

Economical,push wheel setting Timers

(72 x 72) (96 x 96)

Ordering Information

XT264-3 & XT364-3

Terminal Connections

XT264



XT364

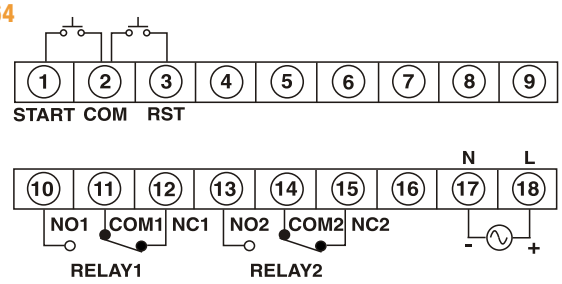

Technical Specifications

Display	7 segment LED; Height: 0.5”
Digits	3 digits
Time Setting	Pushwheel
Operating Modes	ON delay / Interval
Setpoints	1
Range	9.99 / 99.9 / 999 sec, 99.9 / 999 min, 99.9 hr
Counting Direction	Down
Start Input	Pulse start
Accuracy	±0.05% of F.S. or 50 ms
Reset	Front, Remote, Power interruption
LED Indications	Relay status
Output	2 C/O (DPDT)
Relay Rating	5 A @ 230 VAC
Supply Voltage	85 to 270 VAC/DC (AC : 50 or 60 Hz)
Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	**XT264** - 206 gms **XT364** - 350 gms

Dimensions (in mm)

XT264 & XT364

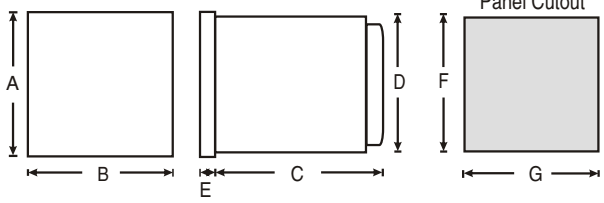

Models \ DIM	A	B	C	D	E	F	G
XT264	72	72	115	68	10	69	69
XT364	96	96	70	90	10	92	92